


# Low outgassing O-Rings

- For KF and ISO centering rings
- Largely anhydrous
- Particle free
- Reduced pump periods
- Consistent quality
- Clean room compatible packing available

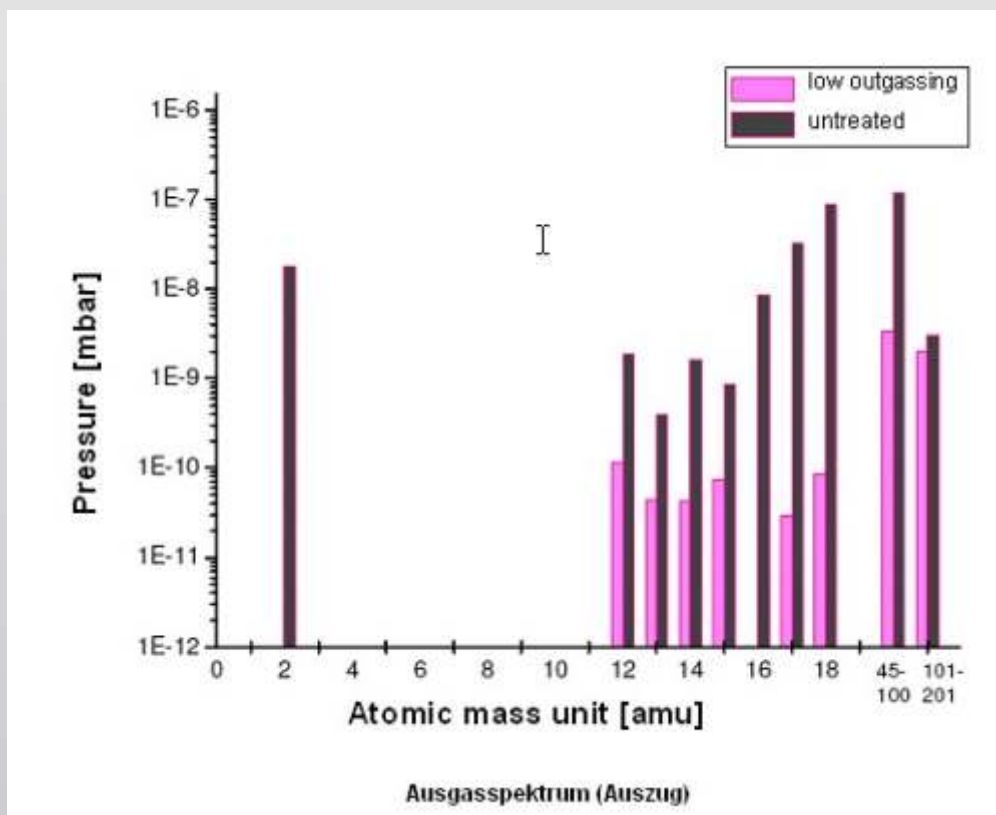

## Technical data

### Material

- FKM (black)

### Temperature range

- -10 °C to 150 °C

### Hardness

- 75 ±5 ° shore (test standard AS TM D 2240)

### Special material properties


- High heat resistance
- High chemically resistance
- Resistant to oils and aliphatic hydrocarbons

### Order data

Order Code	DN	D	L
<b>FPM-ausgasarm</b>			
<b>KF10VR-VB</b>	10	15	5
<b>KF16VR-VB</b>	16	18	5
<b>KF25VR-VB</b>	25	28	5
<b>KF40VR-VB</b>	40	42	5
<b>KF50VR-VB</b>	50	55	5
<b>ISO63VR-VB</b>	63	76	5.3
<b>ISO80VR-VB</b>	80	88	5.3
<b>ISO100VR-VB</b>	100	107	5.3
<b>ISO160VR-VB</b>	160	158	5.3
<b>ISO200VR-VB</b>	200	209	5.3

For clean room compatible packing please add "-CRP" to the order code

Further dimensions on request

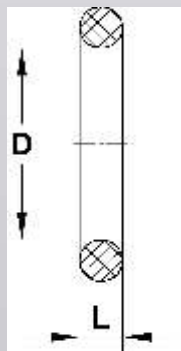

VACOM®

Vakuum Komponenten & Messtechnik GmbH

Gabelsbergerstraße 9 ■ 07749 Jena ■ Germany

Tel. +49(0)3641 4275-0 ■ Fax +49(0)3641 4275-82

info@vacom-vacuum.com ■ www.vacom-vacuum.com ■ www.vacom-shop.de

